



obrázek č.1
picture no.1

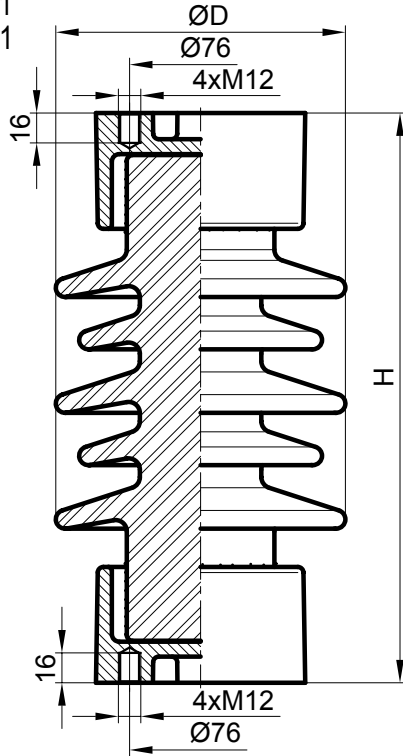

obrázek č.2
picture no.2

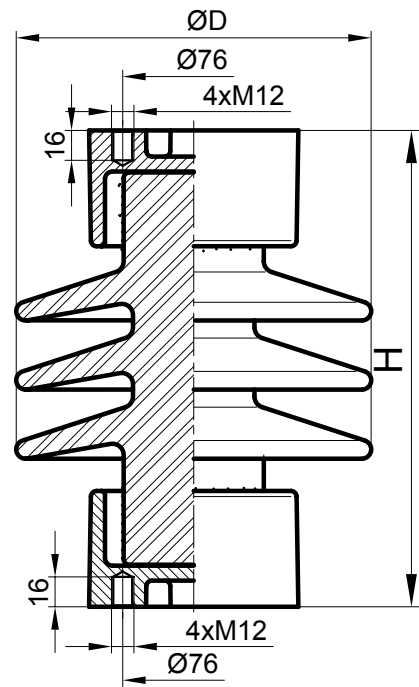

číslo výkresu - typ factory number - type	www.worldofinsulators.com																										
		4245 12 900 C4- 95 III	4245 32 900 C6- 95 III	4246 12 900 C4- 95 II	4246 32 900 C6- 95 II	4247 12 900 C4-125 II	4247 32 900 C6-125 II	4250 12 900 C8-125 II	4248 12 900 C4-150 II	4248 32 900 C6-150 II	4248 52 900 C8-150 II	4249 12 900 C4-170 II	4249 32 900 C6-170 II	4251 12 900 C4-200 II	4251 32 900 C6-200 II	4251 52 900 C8-200 II	4252 12 900 C4-250 II	4252 32 900 C6-250 II	4252 52 900 C8-250 II								
H±1	mm	255		255		305		355		445		475		560													
ØD	mm	190		165		155		185		185		165		175		190											
výdržné atm. impuls. napětí lightning impulse withstand voltage	kV	95		95		125		150		170		200		250													
výdržné střídavé napětí za deště frequency withstand voltage wet	kV	38		38		50		50		70		70		95													
mechanická pevnost v ohybu min. mechanical bending test min.	kN	4	6	4	6	4	6	8	4	6	8	4	6	4	6	8	4	6	8								
kroučící moment torsional moment	kNm	0.8		0.8		0.8		1.5		1.0		1.2		1.2		1.2		1.8		2.0		1.0		2.0		2.5	
povrchová dráha min. - II creepage distance min. - II	mm	450																									
povrchová dráha min. - III creepage distance min. - III	mm			380		500		615		660		850		950		1200											
hmotnost ±10% weight ±10%	kg	8.8		8.3		8.5		8.8		11.3		13.2		14.3		18.6											
obrázek č. picture no		2		2		1		1		1		1		1													