



Izolátory pro elektrostatické filtry

Cylindrical/conical support ESP insulators

Obrázek č.1
Picture No 1

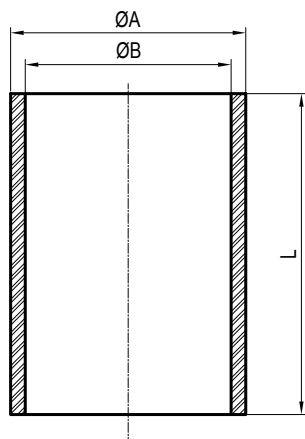

Obrázek č.2
Picture No 2

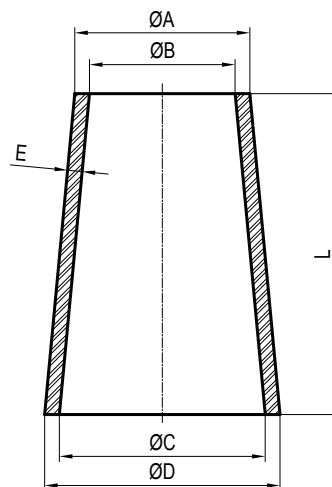

	rozměry dimensions						Maximální stejnoseměrné napětí	Glazura Glaze	Poznámka Comment	Obrázek č. Picture No
	ØA	ØB	ØC	D	E	L				
	mm	mm	mm	mm	mm	mm	kV			
M2013	201,5 ±10	174 ±10	470 ±10	497.5 ±10	27.5	610 ±5	140	šedá gray		2
M2020	274 ±10	230 ±9	324 ±11	368 ±12	----	500 ±1	95	šedá gray		2
M4597	270 ⁺² / ₋₈	----	----	540 ±7	27.5 ±2.5	650 ±10	150	hnědá brown		2
M4598	270 ⁰ / ₋₁₀	----	----	375 ±7	27.5 ±2	500 ±10	95	hnědá brown		2
M4607	(360)	310 ⁺¹⁵ / ₀	----	480 ⁰ / ₋₁₅	25-30	740 ±5	170	hnědá brown		2
M4608	350	305	----	----	----	520	100	hnědá brown		1
M4629	----	300 ⁺¹⁰ / ₋₂	----	----	25 ⁺⁵ / ₋₂	520 ±2	100	bílá white		1
M4639	----	310 ±10	460 ±10	----	17-25	520 ±5	100	hnědá brown		2
M4643	270 ⁰ / ₋₁₀	----	----	375 ±7	27.5 ±2.5	500 ±10	95	hnědá brown		2
M4643	270 ⁰ / ₋₁₀	----	----	375 ±7	27.5 ±2.5	500 ±10	95	šedá gray		2
M4683	356 ±8	305 ±7	----	----	----	610 ±12	140	šedá gray		1
M4692	264 ±6	211 ±6	437 ±7.5	487 ±7.5	25 ±2.5	700 ±10	160	bílá white		2
M4709	270 ⁺⁷ / ₋₈	----	----	500 ±7	27.5 ±2.5	555 ±10	110	šedá gray		2
M4723	360	320 ±10	480 ±10	520	----	520 ±5	100	hnědá brown		2
M4737	270 ⁰ / ₋₁₀	----	----	365 ±7	27.5 ±2.5	500 ±10	95	hnědá brown		2
M4741	264 ±6	211 ±6	324 ±9	376 ±9	20	700 ±10	160	bílá white		2
M4762	350 ⁰ / ₋₁₀	----	400 ±7	455	27.5 ±2.5	500 ±10	95	hnědá brown		2
M4763	356 ±8	305 ±7	----	----	----	610 ±12	140	hnědá brown		1
M4782	240 ±9	----	----	455 ±13	40 ±3	480 ±14	90	hnědá brown		2
M4799	280 ±10	----	----	370 ±12	15	510 ±15	95	bílá white	rýhování knurling	2